


WILDEN PUMP T8

2" METAL

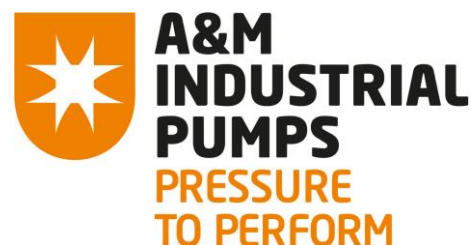

MAX FLOW RATE: 617 LPM (163 GPM)

MAX PRESSURE: 8.6 BAR (125 PSI)

MAX SUCTION LIFT CAPABILITY:

6.4 m (21') Dry, 9.5 m (31') Wet

MAX DIAMETER SOLIDS:

6 mm (1/4")

WETTED HOUSINGS

Material

Aluminum

Cast iron

Ship Wt

33 kg (72 lbs)

52 kg (114 lbs)

NON-WETTED HOUSINGS

Description

Center Section

Air Valve

Material

Aluminum

Brass

ELASTOMER OPTIONS

Buna-N®

-12.2 (+10) to +82.2 (+180) °C (F°)

Neoprene

-17.8 (+0) to +93.3 (+200) °C (F°)

EPDM™

-51.1 (-60) to +137.8 (+280) °C (F°)

Polyurethane

-12.2 (+10) to +65.6 (+150) °C (F°)

Saniflex™

-28.9 (+20) to +104.4 (+220) °C (F°)

PTFE

+4.4 (+40) to +104.4 (+220) °C (F°)

Viton®

-40 (-40) to +176.7 (+350) °C (F°)

Wil-Flex™


-40 (-40) to +107.2 (+225) °C (F°)

Geolast®

-40 (-40) to +82 (+180) °C (F°)

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	404	15.9
B	48	1.9
C	630	24.8
D	668	26.3
E	361	14.2
F	58	2.3
G	61	2.4
H	272	10.7
J	343	13.5
K	229	9.0
L	254	10.0
M	257	10.1
N	312	12.3
P	15	0.6
R	64	2.5
S	51	2.0
T	282	11.1
U	71	2.8
V	282	11.1
W	386	15.2
X	Ø15	Ø0.6

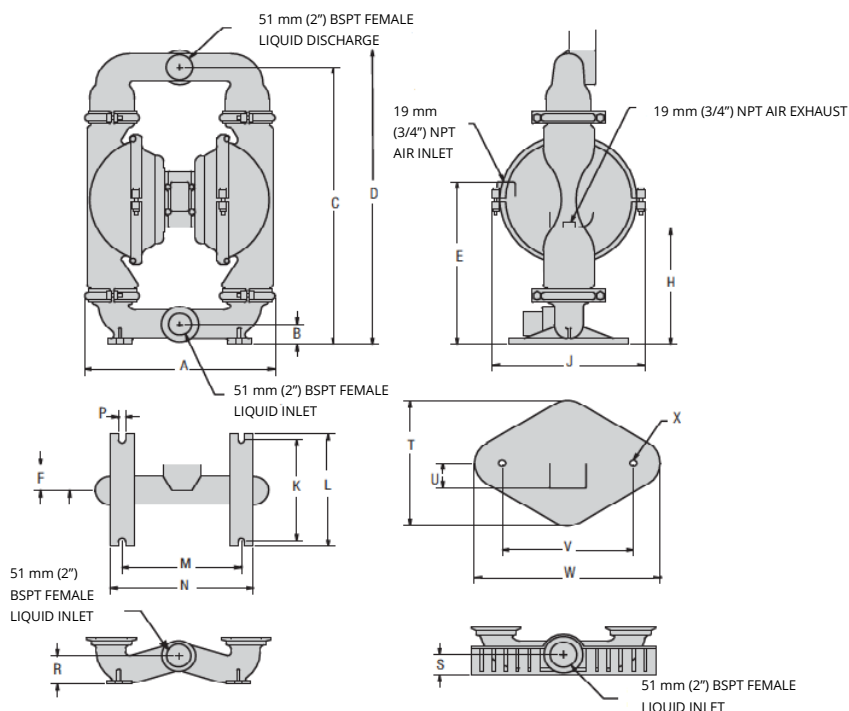

A&M INDUSTRIAL PUMPS NV/SA

DONKSESTEENWEG 8
B-2930 BRASSCHAAT
BELGIUM

PHONE

+32 (0)3 777 46 45

BTW

BE 0455.580.690

IBAN

BE73 4086 0477 5160

HRC

D-55255

INTERNET

WWW.AM-PUMPS.COM

E-MAIL

INFO@AM-PUMPS.COM